

Antares corneal topographer





CORNEAL TOPOGRAPHER


Antores is a fully featured multi-functional corneal topographer. Antares has dedictated software designed to help in the detection and analysis of Dry Eye.

The topography function provides information about the curvature, elevation and refractive power of the cornea. It also provides many parameters to aid in the diagnosis and monitoring of the corneal surface.




FEATURES OF THE SOFTWARE PHOENIX

Antares uses the Phoenix software platform allowing patient data to be saved for future review and analysis, shared by all CSO devices.

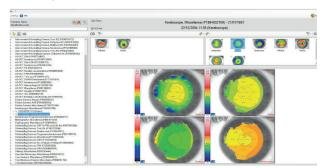


DRY EYE REPORT

Based on the Ocular Surface Disease Index questionnaire (OSDI), limbal and conjunctival hyperaemia, Meibomian glands analysis, tear meniscus analysis, NIBUT, and tear osmolarity, calculated merging together all partial scores, provides an owerall evaluation of the clinical condition of the patient for a comprehesive diagnosis of the dry eye disease.

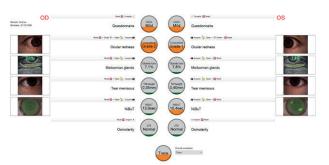


PUPWED COR GRAPHY

Antares has built-in pupillography measurment software. The measurement of the pupil in scotopic (0.04 lux), mesopic (4 lux), photopic (50 lux) conditions and in dynamic modality is fast and simple. Knowing the center and the diameter of the pupil, is essential for many clinical procedures which seek to optimize vision quality.

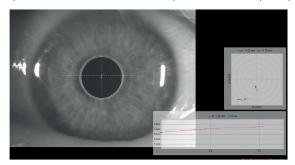


KEKERATOCONOUS BERBENING

Keratoconous screening software, provides the clinician with important information about the patients cornea. Understanding this can help prevent complications associated with ectasia before corneal surgery is undertaken.

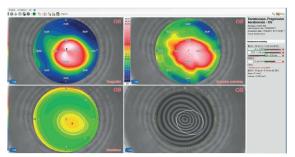

COCONTACTENENSES APPLICATION ON TODELE

A contact lens fitting module is available, which simulates the fit of rigid contact lenses based on an internal database of many lens manufacturers.

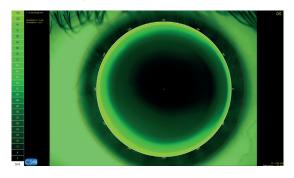


MEMBEDBOBOARAPHY

Meibomian glands can be viewed under infra-red light. Once the image is captured, you can use the software to aid in the analysis of the condition of the glands.




VIDMOEOKERATOSCOPE

Antares has white light to capture color images and videos as well as cobalt blue light for the analysis of contact lens fitting with fluorescein. The magnification can be changed allowing the capture of images with a wide visual field such as the tear meniscus and corneal redness.

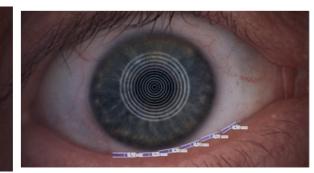

A DADMANO FIDVANIALISSISFOFTEHE A EARLEILM

Placido disk technology allows for the advanced analysis of the tear film, such as NIBUT (Non Invasive Break-up Time).

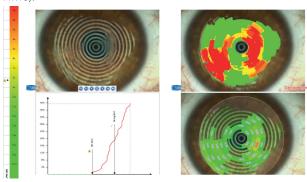




TECHNICAL DATA

| Data transfer | USB 3.0 |
|---|---|
| Power supply | external power source 24 VCC In: 100-240Vac - 50/60Hz - 0.9-05A - Out: 24Vdc - 40W |
| Power net cable | with plug C14 |
| Dimensions (HxDxW) | 515 x 315 x 255mm |
| Weight | 6.5Kg |
| Chin rest movement | 70mm ± 1mm |
| Minimum height of the chin cup from table | 24cm |
| Base movement (xyz) | 105 x 110 x 30mm |
| Working distance | 74mm |
| LIGHT SOURCES | |
| Placido disk | Led @450-650nm |
| Fluorescein stimulation | Led @470nm |
| Pupillography and Meibography | Led @875nm |
| TOPOGRAPHY | |
| Placido disk rings | 24 |
| Measured points | 6144 |
| Topographic covering (at 43D) | 10mm |
| Dioptric measurement range | 1D to 100D |
| Measurement accuracy | Class A according to the UNI EN ISO 19980-2012 |
| Compatibility with standard | DICOM v3 (IHE integration profile EYECARE Workflow) |

MINIMUM SYSTEM REQUIREMENT

PC: 4 GB RAM - Video Card 1 GB RAM (not shared) resolution 1024×768 pixels - USB 3.0 type A Operating system: Windows XP, Windows 7 and Windows 10 (32/64 bit).

^{*}The specifics and the images are not contractually binding and can be modified without notice. Windows® is a Microsoft Corporation trade mark.

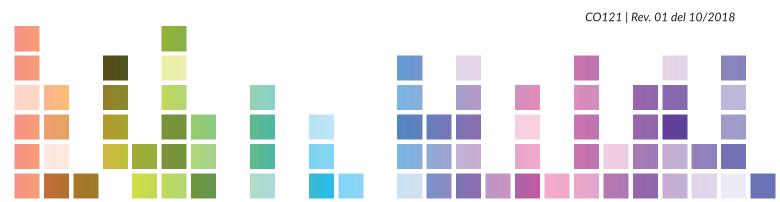



IF & F SERVICE SOLUTIONS